

# BAILEY®

## FALL PROTECTION

# ROOF WORKERS

Bailey Fall Protection Kits provide a complete working at heights compliance system in a convenient water tight bucket.

### PROFESSIONAL

## ROOF WORKERS KIT

Designed for extra comfort and safety. Suitable for all day use with padded shoulder straps and integrated fall indicator.

#### Main components:

- Universal Padded Harness with Fall Indicators.
- 1.4m-2.0m Expandable Energy Absorbing Lanyard.
- 15m Rope Lifeline.
- 1.5m Anchorage Webbing Sling.
- Steel Karabiner.



**Product Number**

**FS14113**

### ENTRY LEVEL

## ROOF WORKERS KIT

Provides all of the critical components of a fall arrest system for people undertaking work on an exposed roof. Designed for good value without compromising safety.

#### Main components:

- Universal Harness.
- 15m Rope Lifeline.
- 1.5m Anchorage Webbing Sling.
- Steel Karabiner.



**Product Number**

**FS14111**

# BEING SAFE IN YOUR WORKZONE...

COMPLIES WITH AS/NZS 1891.1

## TERMINOLOGY


### FALL CLEARANCE

The fall clearance is the clear distance between the user and the nearest obstruction after they have had an arrested free fall. The fall clearance should be a minimum of 1.0m.

See Fig. 5.

To calculate fall clearance the distance between the anchor point and the obstruction below needs to be measured. Then subtract from this distance the height of the user, the lanyard length and the energy absorber extension distance (1.75m maximum). **The remainder of the distance is the fall clearance which must be at least 1.0m.**

**NOTE:** Height of user = From ground level to dorsal D-ring attachment point (allow 1.8m). Allow 1.75m maximum extension of energy absorber.

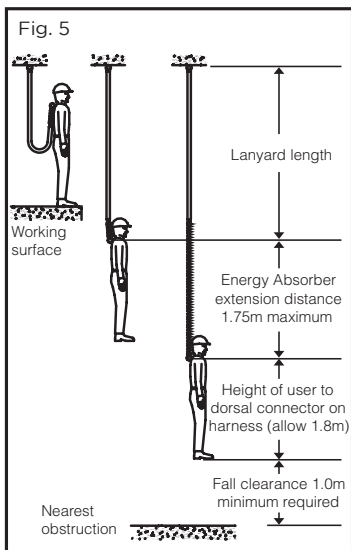

This harness is a life saving device, correct fitting and adjustment will ensure it performs effectively during a fall. Ensure you are confident with fitting and use of this product. If you have any doubt, you must seek clarification.



**SCAN  
QR CODE  
FOR MORE  
INFORMATION**